




DOWANOL™ PPh Glycol Ether Propylene Glycol Phenyl Ether

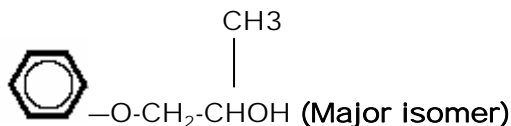

A slow-evaporating, very hydrophobic glycol ether ideal in coalescing and carrier solvent applications

Introduction

DOWANOL™ PPh glycol ether is a slow evaporating, very hydrophobic glycol ether — more hydrophobic than would be expected based simply on its molecular weight. This product has low odor. With its aromatic structure, DOWANOL PPh glycol ether is an excellent match for phenolic coatings and linings; it is also an excellent coalescent for acrylic-based latexes.

DOWANOL PPh glycol ether is also used extensively in dyeing applications, where it can function as both a dye solubilizer and as a dye carrier. Dowanol PPh has superior viscosity reduction properties in metalworking fluids.

Physical properties†

Molecular weight (g/mol)		152.2
Boiling point @ 760 mmHg, 1.01 bar	469°F	243°C
Flash point (Setaflash Closed Cup)	239°F	115°C
Freezing point	66°F	19°C
Vapor pressure@ 20°C — extrapolated		0.01 mmHg 0.02 mbar
Specific gravity (25/25°C)		1.062
Density @ 20°C	8.87 lb/gal	1.063 g/cm ³
@ 25°C	8.83 lb/gal	1.059 g/cm ³
Viscosity (cP or mPa.s @ 25°C)		22.7
Surface tension (dynes/cm or mN/m @ 25°C)		38.1
Specific heat (J/g°C @ 25°C)		2.18
Heat of vaporization (J/g) at normal boiling point		319
Net heat of combustion (kJ/g) — predicted @ 25°C		30.4
Lower Flammable Limit (mole%) @ 125°C		0.8
Autoignition temperature	923°F	495°C
Evaporation rate	(n-butyl acetate = 1.0) (diethyl ether = 1.0)	0.002 >1200
Solubility, g/100 g @ 25°C		
Solvent in water		2 (2 wt%)
Water in solvent		6.4 (6 wt%)
Hansen solubility parameters (J/cm ³) ^{1/2}		
_d (Dispersion)		17.4
_p (Polar)		5.3
_h (Hydrogen bonding)		11.5
Flammable limits (vol.% in air)		
Lower (calculated)		0.8
Upper		--

†The physical property data listed here are considered to be typical properties, not specifications.

Classification/Registry Numbers††

CAS Number	770-35-4
AICS (Australia)	770-35-4
DSL (Canada)	770-35-4
IECSC (China)	770-35-4
ENCS (Japan)	(7)-78 CAS #: SJE070078
NZIoC (New Zealand)	770-35-4
PICCS (Phillippines)	770-35-4
KECI (Korea)	3-2899
EINECS (EU)	212-222-7
TSCA (U.S.)	770-35-4

†† **NOTE:** Inventory/Registry apply only to this glycol ether product. It is the responsibility of the formulator to ensure that the final finished product complies with the regulations of a given country prior to its sale or distribution in that country.

Suggested Applications

- Latex coalescent in water-based architectural and industrial coatings.
- Carrier solvent for textile dyes.
- Solvent for inks in ball point and felt tip pens, stamp pads, and textile printing pastes.
- Paint removers.
- Coalescent for latex adhesives.
- Useful in the formulation of homogeneous, stable metalworking fluids.

Features

- Coalescing ability
- Powerful solvency
- High dilution ratio
- Low evaporation rate
- Low viscosity
- Storage stability

NOTE: Consult the appropriate Material Safety Data Sheet for safety and handling guidelines for this product.

*The Dow Chemical Company
Midland, Michigan 48674 U.S.A.

In The United States And Canada:
1-800-447-4369
Fax: 1-989-832-1465

In Europe: +800 3 694 6367
Toll Phone: +32 3 450 2240
Toll Fax: +32 3 450 2815

In The Pacific: +800 7776 7776
Fax: +800 7779 7779
In Other Global Areas: 1-989-832-1556
Fax: 1-989-832-1465

Notice: No freedom from any patent owned by Seller or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Seller assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

Published March 2008