

---

## Product Safety Assessment

### Linear Low Density Polyethylene (LLDPE) Resins

#### Select a Topic:

[Names](#)  
[Product Overview](#)  
[Manufacture of Product](#)  
[Product Description](#)  
[Product Uses](#)  
[Exposure Potential](#)  
[Health Information](#)  
[Environmental Information](#)  
[Physical Hazard Information](#)  
[Regulatory Information](#)  
[Additional Information](#)  
[References](#)

#### Names

- CAS No. 25087-34-7
- CAS No. 25213-02-9
- CAS No. 26221-73-8
- Linear low density polyethylene
- LLDPE
- 1-Butene, copolymer with ethene
- 1-Hexene, copolymer with ethene
- 1-Octene, copolymer with ethene
- DOWLEX™ polyethylene resin

#### Product Overview

- Linear low density polyethylene (LLDPE) resins are copolymers made from ethylene and an alpha-olefin, either 1-butene, 1-hexene, or 1-octene.<sup>1</sup> LLDPE resins are similar to low density polyethylene (LDPE) resins; both have good clarity, good moisture and gas barrier properties, can be heat-sealed, and are strong and flexible. LDPE has greater clarity and higher gloss and is easier to process. LLDPE has greater tensile and impact strength, better heat-seal properties, and lower cost.<sup>2,3</sup> For further details, see [Product Description](#).
- LLDPE resins are manufactured as odorless white pellets or granules.<sup>4</sup> The pellets are used in industrial fabrication processes such as blown and cast film, extrusion coatings, injection molding, and rotomolding. Products made from LLDPE include industrial containers, trash cans, automotive parts, closures, hot- and cold-water piping, and plastic films. Films made from these resins are extremely tough, as well as puncture- and tear-resistant. Some specific film applications are food and specialty packaging, heavy-duty trash bags, and pallet wrap.<sup>5,6</sup> For further details, see [Product Uses](#).
- Eye contact with polyethylene resins or dusts may cause irritation or corneal injury due to mechanical action (scratching). Vapor from the heated resin may cause mild discomfort and redness of the eyes, or respiratory irritation. Prolonged skin contact is essentially nonirritating. These resins are often processed as molten polymer at elevated temperatures. Contact with the heated resin may cause burns.<sup>7</sup> For further details, see [Health Information](#).
- Because LLDPE resins are used extensively in food packaging and other consumer products, consumer contact is likely. Workplace exposure is also possible.<sup>8</sup> For further details, see [Exposure Potential](#).
- Spilled LLDPE resins can create an industrial slipping hazard. Products made from these resins are plastics that are expected to be inert in the environment.<sup>9</sup> For further details, see [Physical Hazard Information](#).

[Back to top](#)

---

®™ Trademark of The Dow Chemical Company (“Dow”) or an affiliated company of Dow

## Manufacture of Product<sup>10</sup>

- **Capacity** – Global production of LLDPE in 2006 was estimated at 18.4 million metric tons (40.7 billion pounds). Dow manufactures LLDPE at facilities in Freeport, Texas; Plaquemine, Louisiana; Fort Saskatchewan, Alberta, Canada; Map Ta Phut, Thailand; Schkopau, Germany; Tarragona, Spain; and Terneuzen, The Netherlands.
- **Process** – Dow currently uses two different processes to produce LLDPE. The traditional process reacts ethylene with an olefin comonomer in a hydrocarbon solvent along with a Ziegler catalyst in a series of two continuous stirred-tank reactors. Product is removed from the second reactor, the pressure is adjusted, and excess ethylene gas is removed. The solvent then is removed and the remaining copolymer melt is extruded and formed into pellets. In the second process (UNIPOL™ process) ethylene and the comonomer react as gases at low pressure in a continuous “fluidized bed” reactor to form a granular resin, which is mixed with additives and compounded into pellets.

[Back to top](#)

## Product Description<sup>11,12</sup>


LLDPE resins are manufactured as odorless white pellets or granules. LLDPE polymer is made from ethylene and the comonomer alpha-olefins 1-butene, 1-hexene, or 1-octene. The molecular structure of LLDPE is characterized by a mostly linear copolymer backbone with some short-chain branching. Copolymer properties are determined by the type of olefin comonomer used, the amount of the comonomer in the chain, and the molecular weight. Typical comonomer concentrations are 5 to 12% weight percent. Compared to LDPE, LLDPE has greater tensile and impact strength, better heat-seal properties, and lower cost. LLDPE is often blended with LDPE, high density polyethylene (HDPE), or other polyolefin resins to tailor the physical characteristics for specific products.

[Back to top](#)

## Product Uses<sup>13,14,15</sup>

LLDPE resins are used in the following industrial fabrication processes:

- **Film** (blown and cast) – Applications include food packaging (crackers, cereals, bakery goods, liquid and semisolid foods, meat and cheese, boil-in-bag vegetables, ice bags), nonfood (retail carry-out bags and sacks, heavy-duty trash bags, industrial liners, disposable diapers, medical packaging, newspaper/mailed bags, bundling and overwrap, textile packaging), shrink wrap, and stretch wrap (pallet wrap). Films used for food applications are FDA compliant.
- **Extrusion coatings** – coatings for metals for corrosion prevention.
- **Injection molding** – industrial containers, trash cans, lawn and garden products, kitchen accessories, luggage and furniture parts, recreational products, medical-related products, toys, sporting goods, and caps and closures (coffee can lids, corks for wine and other bottles, parts for aerosol trigger sprays or pump systems).
- **Rotomolding** – backyard play equipment, toys, canoes, kayaks, ducts, automotive parts, outdoor signs, and other products.

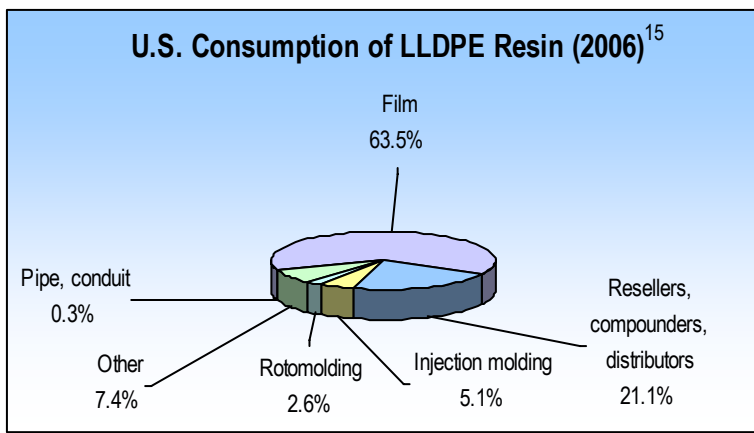

<sup>®™</sup> Trademark of The Dow Chemical Company (“Dow”) or an affiliated company of Dow

- **Profile extrusion** – pipes, hoses, and tubing, including weather-resistant drip irrigation tubing and hot and cold water pipes.
- **Other** – wire and cable (insulation and jacketing materials for power and telecommunications cable), rigid and flexible sheeting.

[Back to top](#)

## Exposure Potential

LLDPE resins are not sold directly to consumers, but are used extensively in consumer and industrial products. Based on the uses for LLDPE, the public could be exposed through:

- **Workplace exposure**<sup>16</sup> – Exposure can occur in a manufacturing facility that makes LLDPE resins or in fabrication facilities that use these resins. Those working with LLDPE could be exposed during maintenance, sampling, testing, or other procedures. Good housekeeping practices and control of resin dusts are necessary for safe handling of these products. Each facility should have a thorough training program for employees and appropriate work processes and safety equipment in place to limit unnecessary exposure. See [Health Information](#).
- **Consumer exposure to products containing LLDPE** – LLDPE resins are fabricated into many consumer products. It is likely everyone uses plastic products made with LLDPE or LLDPE blends daily. See [Health Information](#).
- **Environmental releases**<sup>17</sup> – Industrial spills or releases are infrequent and generally contained. In the event of a spill, the focus is on containing the spill to prevent contamination of soil, ditches, sewers, waterways, or groundwater. If a large spill does occur, contain the spilled material if possible. Sweep up and collect the recovered material in suitable and properly labeled containers. Use appropriate safety equipment. See [Environmental](#), [Health](#), and [Physical Hazard Information](#).
- **In case of fire** – Keep people away and deny unnecessary entry. Firefighters should wear positive-pressure, self-contained breathing apparatus (SCBA) and protective firefighting clothing. If protective equipment is not available, fight the fire from a protected location or safe distance. Use water fog or fine spray, dry-chemical or carbon-dioxide fire extinguishers, or foam. **Do not use** a direct water stream on molten material. Cool surroundings with water to localize the fire zone. Follow emergency procedures carefully. See [Environmental](#), [Health](#), and [Physical Hazard Information](#).

For more information, see the relevant [Safety Data Sheet](#).

[Back to top](#)

## Health Information<sup>18</sup>

Dow's LLDPE resins used for food-contact applications are U.S. Food and Drug Agency (FDA) and EU-Directive compliant for consumer safety.

**Eye and Skin Contact** – Eye contact with LLDPE resins or dust may cause irritation or corneal injury due to mechanical action (scratching). Vapor from the heated resin may cause mild discomfort and redness of the eyes. Prolonged skin contact is essentially nonirritating. These materials are often processed as molten polymers at elevated temperatures and skin contact with the heated material may cause burns.

**Inhalation** – No adverse effects are anticipated from a single exposure to dust. Vapors or fumes released during thermal processing may cause respiratory irritation.

**Ingestion** – These materials have very low toxicity if swallowed. However, the granules may represent a choking hazard.

For more information, see the relevant [Safety Data Sheet](#).

### **Environmental Information**<sup>19</sup>

LLDPE resins are expected to be inert in the environment. They float on water and are not biodegradable. They are not expected to bioconcentrate (accumulate in the food chain) due to their high molecular weight. LLDPE pellets or granules are not expected to be toxic if ingested, but may represent a choking hazard if ingested by waterfowl or aquatic life.

For more information, see the relevant [Safety Data Sheet](#).

[Back to top](#)

### **Physical Hazard Information**<sup>20</sup>

Spilled LLDPE resins can create an industrial slipping hazard. Pneumatic conveying and other mechanical handling operations can generate combustible dust. Prolonged exposure to elevated temperatures can cause these resins to decompose. At temperatures exceeding melt temperatures, polymer fragments can be released. Fumes can be irritating. Decomposition products include aldehydes, ketones, alcohols, organic acids, trace amounts of hydrocarbons, and other compounds.

For more information, see the relevant [Safety Data Sheet](#).

[Back to top](#)

### **Regulatory Information**

Regulations may exist that govern the manufacture, sale, transportation, use, and/or disposal of LLDPE. These regulations may vary by city, state, country, or geographic region. Information may be found by consulting the relevant [Safety Data Sheet](#), [Technical Data Sheet](#), or [Contact Us](#).

[Back to top](#)

### **Additional Information**

- Safety Data Sheet (<http://www.dow.com/webapps/msds/msdssearch.asp>)
- Contact Us (<http://plastics.dow.com/plastics/na/contact/>)
- Borruso, Andrea V., "Linear Low-Density Polyethylene (LLDPE) Resins," *Marketing Research Report: Chemical Economics Handbook*, SRI Consulting, July 2007
- *Profile of the Plastic Resin and Manmade Fiber Industries*, Office of Compliance Sector Notebook Project, U.S. Environmental Protection Agency, Washington, D.C., September 1997 (<http://www.epa.gov/Compliance/resources/publications/assistance/sectors/notebooks/resfibs.pdf>)
- *Understanding Plastic Film: Its Uses, Benefits and Waste Management Options*, Headley Pratt Consulting for the American Plastics Council, December 1996 ([http://www.americanchemistry.com/s\\_plastics/bin.asp?SID=6&DID=4603&CID=&VID=178&DOC=File.PDF](http://www.americanchemistry.com/s_plastics/bin.asp?SID=6&DID=4603&CID=&VID=178&DOC=File.PDF))

For more business information about LLDPE and other polyethylene resins, visit Dow's Polyethylene web site at <http://plastics.dow.com/about/polyethylene.htm>.

[Back to top](#)

---

<sup>®™</sup> Trademark of The Dow Chemical Company ("Dow") or an affiliated company of Dow

---

## References

- <sup>1</sup> *Profile of the Plastic Resin and Manmade Fiber Industries*, Office of Compliance Sector Notebook Project, U.S. Environmental Protection Agency, Washington, D.C., September 1997, page 32.
- <sup>2</sup> *Understanding Plastic Film: Its Uses, Benefits and Waste Management Options*, Headley Pratt Consulting for the American Plastics Council, December 1996, page 5.
- <sup>3</sup> Borruso, Andrea V., "Linear Low-Density Polyethylene (LLDPE) Resins," *Marketing Research Report: Chemical Economics Handbook*, SRI Consulting, July 2007, page 45–57.
- <sup>4</sup> *DOWLEX™ 2045G Polyethylene Resin Material Safety Data Sheet*, The Dow Chemical Company, ID No. 80362/1001, Version 2.0, April 28, 2006, pages 1 and 4.
- <sup>5</sup> Dow Plastics North America – DOWLEX Polyethylene Resins web page: <http://plastics.dow.com/plastics/na/prod/polyethylene/dowlex.htm>.
- <sup>6</sup> Dow Plastics North America – Dow Linear Low Density Polyethylene Resins web page: <http://plastics.dow.com/plastics/na/prod/polyethylene/lldpe.htm>.
- <sup>7</sup> *DOWLEX 2045G Polyethylene Resin Material Safety Data Sheet*, The Dow Chemical Company, ID No. 80362/1001, Version 2.0, April 28, 2006, pages 1–2 and 4.
- <sup>8</sup> *DOWLEX 2045G Polyethylene Resin Material Safety Data Sheet*, The Dow Chemical Company, ID No. 80362/1001, Version 2.0, April 28, 2006, page 3.
- <sup>9</sup> *DOWLEX 2045G Polyethylene Resin Material Safety Data Sheet*, The Dow Chemical Company, ID No. 80362/1001, Version 2.0, April 28, 2006, pages 1 and 4.
- <sup>10</sup> Borruso, Andrea V., "Linear Low-Density Polyethylene (LLDPE) Resins," *Marketing Research Report: Chemical Economics Handbook*, SRI Consulting, July 2007, pages 9, 10, 13, and 18–19.
- <sup>11</sup> *DOWLEX 2045G Polyethylene Resin Material Safety Data Sheet*, The Dow Chemical Company, ID No. 80362/1001, Version 2.0, April 28, 2006, pages 1 and 4.
- <sup>12</sup> Borruso, Andrea V., "Linear Low-Density Polyethylene (LLDPE) Resins," *Marketing Research Report: Chemical Economics Handbook*, SRI Consulting, July 2007, pages 15–16, 43, and 45–57.
- <sup>13</sup> Dow Plastics North America – DOWLEX Polyethylene Resins web page: <http://plastics.dow.com/plastics/na/prod/polyethylene/dowlex.htm>.
- <sup>14</sup> Dow Plastics North America – Dow Linear Low Density Polyethylene Resins web page: <http://plastics.dow.com/plastics/na/prod/polyethylene/lldpe.htm>.
- <sup>15</sup> Borruso, Andrea V., "Linear Low-Density Polyethylene (LLDPE) Resins," *Marketing Research Report: Chemical Economics Handbook*, SRI Consulting, July 2007, pages 41–42, and 45–57.
- <sup>16</sup> *DOWLEX™ 2045G Polyethylene Resin Material Safety Data Sheet*, The Dow Chemical Company, ID No. 80362/1001, Version 2.0, April 28, 2006, page 3.
- <sup>17</sup> *DOWLEX 2045G Polyethylene Resin Material Safety Data Sheet*, The Dow Chemical Company, ID No. 80362/1001, Version 2.0, April 28, 2006, page 2.
- <sup>18</sup> *DOWLEX 2045G Polyethylene Resin Material Safety Data Sheet*, The Dow Chemical Company, ID No. 80362/1001, Version 2.0, April 28, 2006, pages 1–2 and 4.
- <sup>19</sup> *DOWLEX 2045G Polyethylene Resin Material Safety Data Sheet*, The Dow Chemical Company, ID No. 80362/1001, Version 2.0, April 28, 2006, page 4.
- <sup>20</sup> *DOWLEX 2045G Polyethylene Resin Material Safety Data Sheet*, The Dow Chemical Company, ID No. 80362/1001, Version 2.0, April 28, 2006, pages 1–2 and 4.

[Back to top](#)

NOTICES:

As part of its 2015 Sustainability Goals, Dow has committed to make publicly available safety assessments for its products globally. This product safety assessment is intended to give general information about the chemical (or categories of chemicals) addressed. It is not intended to provide an in-depth discussion of health and safety information. Additional information is available through the relevant Safety Data Sheet, which should be consulted before use of the chemical. This product safety assessment does not replace required communication documents such as the Safety Data Sheet.

The information herein is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Dow be responsible for damages of any nature whatsoever resulting from the use of or reliance upon the information herein or the product to which that information refers.

Nothing contained herein is to be construed as a recommendation to use any product, process, equipment or formulation in conflict with any patent, and Dow makes no representation or warranty, express or implied, that the use thereof will not infringe any patent.

NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS.

Dow makes no commitment to update or correct any information that appears on the Internet or on its World-Wide Web server. The information contained in this document is supplemental to the Internet Disclaimer, <http://www.dow.com/homepage/disclosure.html>

[Back to top](#)

Form No. 233-00519-MM-0908