

DOWSIL™ 758 Silicone Weather Barrier Sealant

Unparalleled unprimed adhesion to window flashing and fenestration materials

Features/Benefits

Low-VOC DOWSIL™ 758 Silicone Weather Barrier Sealant offers strong adhesion to the most challenging materials, including:

- Self-adhered window flashing and wraps
- Nonwoven spunbound window flashing and wraps
- Polyethylene wraps
- Polyethylene surfaces
- Polypropylene surfaces
- Common polyolefins
- PVC
- Steel, aluminum and metals
- Fluorinated surfaces

buildabetterbarrier.com

DOWSIL™ 758 Silicone Weather Barrier Sealant brings long-term durability and ease of use for sealing challenging weather barrier substrates. Its consistent adhesion performance and compatibility outperform traditional sealants. With $\pm 25\%$ movement capability, architects benefit from increased design flexibility.

Adhesion/Compatibility Comparison

Window Flashing Products and Fenestration Surfaces	DOWSIL™ 758 Silicone Weather Barrier Sealant	DOWSIL™ 756 SM Building Sealant	DOWSIL™ 790 Silicone Building Sealant
Grace Ice and Water Shield	✓		
Grace Perm-A-Barrier	✓	✓	✓
Grace Vycor Plus Self-Adhered Flashing	✓		
Tyvek Window Flashing	✓		
Carlisle CCW 705	✓	✓	✓
PVC Andersen	✓		
Fluoropolymers – Kynar Polyvinylidene Fluoride (PVDF), Duranar	✓	✓	✓ (Requires Primer)

Please contact Dow for a full list of tested substrates.

DOWSIL™

silicone adhesives by



Product Properties


Property	Unit	Value
Flow, Sag or Slump	Inch	0.06
VOC Content	g/L	61
Durometer	Hardness, A Scale	45
Tensile, Maximum	psi	200
Elongation	%	800
Movement, Ext./Comp.	%	+/-25
Staining		None
QUV, 5,000 hr		Pass +
Shelf Life	Months	12

Contact us


Dow is collaborating with industry professionals around the world to develop solutions to improve the energy efficiency of buildings, reduce the eco-footprint of construction materials, and improve the health and safety of building occupants. Learn more about DOWSIL™ 758 Silicone Weather Barrier Sealant and our full range of High Performance Building Solutions, including service and support, at BuildaBetterBarrier.com.

Dow has sales offices, manufacturing sites, and science and technology laboratories around the globe. Find local contact information at dow.com/contactus.

Sealant Comparison – Adhesion to Typical Building Substrates

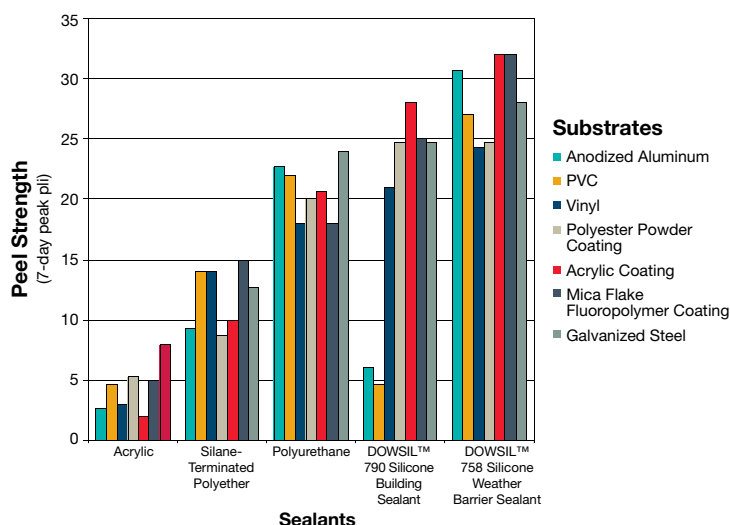

Sealant Comparison – Adhesion to Weather Barriers

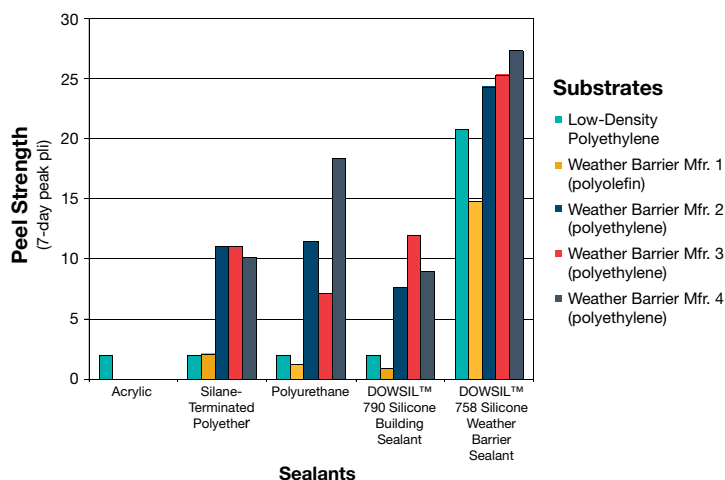

Dow Building Science website:
dow.com/buildingscience

Visit us on X
[@DowBSscience](https://twitter.com/DowBSscience)



Contact Dow Building Science:
dow.com/customersupport

Visit us on LinkedIn
[Dow Building Science](https://www.linkedin.com/company/dow-building-science)

PRODUCT SAFETY INFORMATION REQUIRED FOR SAFE USE IS NOT INCLUDED IN THIS DOCUMENT. BEFORE HANDLING, READ PRODUCT AND SAFETY DATA SHEETS AND CONTAINER LABELS FOR SAFE USE, PHYSICAL AND HEALTH HAZARD INFORMATION. THE SAFETY DATA SHEET IS AVAILABLE ON THE DOW WEBSITE AT [WWW.DOW.COM](https://www.dow.com), OR FROM YOUR DOW SALES APPLICATION ENGINEER, OR DISTRIBUTOR, OR BY CALLING DOW CUSTOMER SERVICE.

NOTICE: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

Dow has not performed architectural, engineering or other professional services in connection with any of the projects referenced herein, and Dow assumes no responsibility for any design, specifications, requirements (included but not limited to windload), materials, samples, design elements, or testing of any design components, including the adequacy or completeness of the same, supplied or used by any party. Dow will only warrant products as set forth in a separate executed Dow warranty.

®™ Trademark of The Dow Chemical Company ("Dow") or an affiliated company of Dow

© 2024 The Dow Chemical Company. All rights reserved.

2000024823-7220

Form No. 63-6152-01-0824 S2D