



## DOWSIL™ Neutral Plus Silicone Sealant

Multi-purpose one-part neutral cured silicone sealant

### Features & Benefits

- One-part room temperature cured silicone sealant
- Keeps flexibility at -40°C~150°C after cured
- Good adhesion to various construction substrates, such as glass, anodized aluminum, GMS steel, ceramic, and some surface treated materials

### Applications

DOWSIL™ Neutral Plus Silicone Sealant is a multi-purpose silicone sealant. Its typical applications include:

- Residential window and door glazing and sealing
- Residential decoration filling and sealing, frame and floor filling

### Typical Properties

Specification Writers: These values are not intended for use in preparing specifications.

Test <sup>1</sup>	Property	Unit	Result	
	Color		Translucent	Black, White, Grey
<b>Uncured – 23°C, 50% R.H.</b>				
GB/T13477.6-2002	Flow	mm	< 3	< 3
GB/T13477.5-2002	Tack-Free Time	min	15	8.4
GB/T13477.4-2002	Extrusion Rate <sup>2</sup>	g/min	530	397
GB/T13477.2-2002	Specific Gravity	g/cm <sup>3</sup>	0.98	1.40
<b>Cured 7 days – 23°C, 50% R.H.</b>				
ASTM D2240	Hardness	Shore A	21	35
ASTM D412	Tensile Strength	MPa	1.43	1.26
ASTM D412	Elongation at Break	%	444	455

1. GB: National Standard. ASTM: American Society for Testing and Materials
2. Extrusion rate: Test 3.2 mm caliber under 0.62 MPa.

### Description

DOWSIL™ Neutral Plus Silicone Sealant is a multi-purpose one-part neutral cured silicone sealant, designed for residential window and door filling and sealing, and residential decoration filling.

## How to Use


### Step 1

#### Correct Joint Design:

Correct joint design minimizes stresses on the sealant, enables optimum sealant movement capability, facilitates sealant application and minimizes the potential for sealant splitting and voiding by enabling cure by-products to exit from the joint.

#### Guidelines Are:

1. Minimum joint width of 6 mm.
2. Minimum joints depth of 6 mm.
3. For larger joints the width of the joint should be greater than the sealant depth, recommended the ratio of joint width to depth is 2:1.
4. Avoid 3-sided adhesion: Apply backer rod or bond breaker tape in the base of the joint to ensure the sealant is only bonded to the sides of the joint and is free to move to its full capacity under joint movement (refer Figure 1).

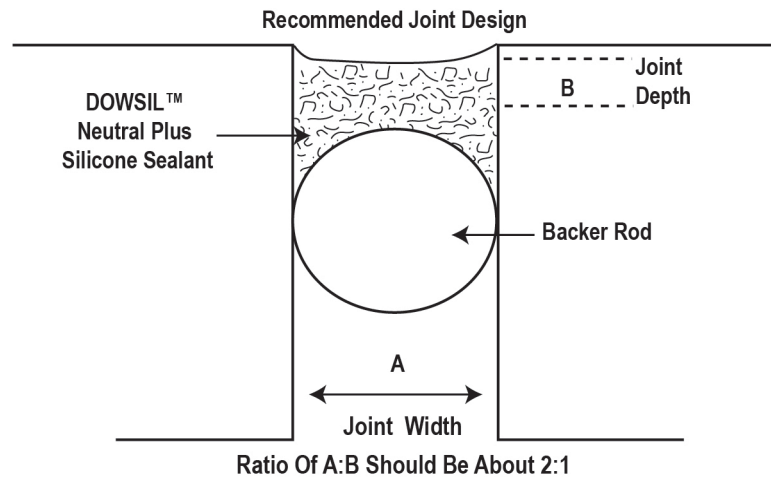

**Figure 1**

### Step 2

#### Clean All Joint Surfaces:

Substrate surfaces must be completely clean, dry and sound. Completely remove any loose debris and/or old sealant. Since many materials have protective films, they need to be cleaned with solvents such as toluene, xylene, methyl ethyl ketone, and banana oil.

- For non-porous materials such as glass and aluminum alloy materials:  
Wipe the interface surface with a lint-free, white cloth and solvent to clean grease and dirt.
- Immediately wipe again with another piece of clean cloth to completely remove any remaining solvent and impurities from the interface.
- Primer:  
Some materials may require a Dow primer to enhance adhesion to the material. Please contact Dow for more information on Dow primer.

## **How to Use (Cont.)**

### **Step 3**

#### **Install Backing Material:**

Backer rod (e.g. closed cell polyethylene type or open cell polyurethane foam type) or similar material (e.g. low tack polyethylene tape for shallow joints) can be used in the base of the joint to control sealant depth and avoid 3 sided adhesion by prevention adhesion to the base of the joint.

### **Step 4**

#### **Mask Adjacent Surfaces With Masking Tape:**

Masking will ensure a clean, neat appearance and reduce clean up by protecting surrounding areas from excess sealant.

### **Step 5**

#### **Applying Sealant:**

1. Cut tip off the cartridge.
2. Cut nozzle at 45° angle to the desired shape and size.
3. Screw nozzle onto cartridge.
4. Place cartridge in caulking gun. Air-operated or hand-operated caulking guns can be used.
5. Apply sealant into the base of the joint so that it completely fills the joint, wetting both sides. Do not simply lay a bead on the surface as the sealant will not penetrate the joint under its own weight.

### **Step 6**

#### **Tool Joint and Remove Masking Tape:**

- Tool the surface of the joint immediately after sealant application to provide a smooth even finish and to ensure the sealant wets the sides of the joint.
- Tooling should be completed in one continuous stroke before the sealant forms a skin (i.e.: within the working time). A tool with a convex profile is recommended to keep the sealant within the joint. When sealing horizontal joints tool the sealant to that any liquids (e.g. rain water, cleaning solutions) do not collect and pool on top of the sealant.
- Do not use soap or water as tooling aids.
- Remove masking tape immediately after tooling and before the sealant skins.
- After a skin has formed, do not disturb the joint for 48 hours.
- Avoid contact with various cleaning agents or solvents whilst sealant is curing.
- Uncured sealant can best be cleaned from tools using commercial solvents such as xylene, toluene or methyl ethyl ketone. Cured sealant is not soluble and must be trimmed with a blade, avoid undercutting the seal.

## How to Use (Cont.)

### Usage Rate Table

The table below provides a guide to the linear meters per cartridge for various joint sizes.

NOTE: Actual sealant usage will vary depending on such factors as joint geometry, backer rod placement, tooling and wastage at the job site.

Joint Depth (mm)	Joint Width						
	6	8	10	12	15	20	25
6	8.3	6.2	5.0	4.1	3.3	2.5	2.0
8	N/O	4.6	3.7	3.2	2.5	1.8	1.5
10	N/O	N/O	3.0	2.5	2.0	1.5	1.2
12	N/O	N/O	N/O	2.0	1.6	1.2	1.0

## Handling Precautions

PRODUCT SAFETY INFORMATION REQUIRED FOR SAFE USE IS NOT INCLUDED IN THIS DOCUMENT. BEFORE HANDLING, READ PRODUCT AND SAFETY DATA SHEETS AND CONTAINER LABELS FOR SAFE USE, PHYSICAL AND HEALTH HAZARD INFORMATION. THE SAFETY DATA SHEET IS AVAILABLE ON THE DOW WEBSITE AT CONSUMER.DOW.COM, OR FROM YOUR DOW SALES APPLICATION ENGINEER, OR DISTRIBUTOR, OR BY CALLING DOW CUSTOMER SERVICE.

Test it before use. The user is responsible to conduct property test before using to confirm the sealant produces satisfied results. Especially for the surface which is difficult to adhesion and coated substrates, the cohesiveness should be tested. Be careful the application temperature. When the substrates surface is over than 50°C, it is easy to cause fast-cure or bubbles. When the substrates temperature is lower than 5°C, it is easy to slow-cure. And also, a layer of indiscernible fog is formed on the surface of substrates, which affects the cohesive, so it should be wiped with a piece of dry cloth or heat blow drier. Keep environment well-ventilated and avoid inhaling too much volatile gas generated during cure.

## Usable Life and Storage

Stored properly in a dry and well-ventilated place below 30°C. Usable life is 18 months in original package. For more information please refer to the package.

## Packaging Information

- 300 ml cartridge, 24 cartridges per carton

## Limitations

This product is neither tested nor represented as suitable for medical or pharmaceutical uses.

If you need advanced sealant used for curtain wall construction, please contact your local Dow representative. This product is not suitable for the following purposes:

- Curtain wall glazing
- Continuous water immersion
- Materials that bleed plasticizers or solvents or release by-products that may inhibit its cure, affect adhesion or discolor the sealant
- Unventilated places

## **Health and Environmental Information**

To support customers in their product safety needs, Dow has an extensive Product Stewardship organization and a team of product safety and regulatory compliance specialists available in each area.

For further information, please see our website, [consumer.dow.com](http://consumer.dow.com) or consult your local Dow representative.

[consumer.dow.com](http://consumer.dow.com)

### **LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY**

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that our products are safe, effective, and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow's sole warranty is that our products will meet the sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

**TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DOW SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.**

**DOW DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.**

