



DOWSIL™ 603T Additive

Silicone additive reducing gloss and improving surface properties such as scratch resistance or softness in solventless UV coatings

Features & Benefits

- White silicone fine powder
- Contain methacryloxy group
- Provides matte finish
- Imparts scratch resistance
- Improves coating softness

Composition

- Silicone Elastomer Powder with methacryloxy functionality

Applications

- Acrylic UV inks and paints

Typical Properties

Specification Writers: These values are not intended for use in preparing specifications.

Test	Unit	Result
Appearance		White powder
Average particle size	µm	2
Particle size distribution	µm	1–3
Bulk density	g/mL	0.13

Description

DOWSIL™ 603T Additive is a cross-linked methacryloxy functional silicone elastomer powder.

How To Use

DOWSIL™ 603T Additive can be added into a resin under high shear conditions.

Typical addition level 1% to 10% based on coating solids depends on the desired level of matting and scratch resistance.

Performance In UV Acrylic Ink

Matting

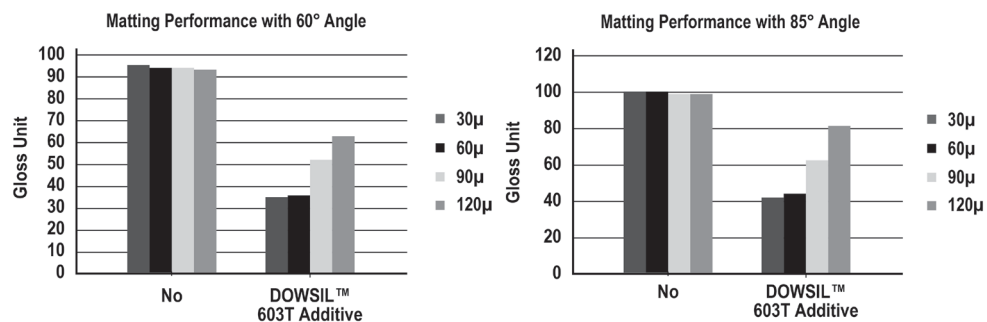


Figure 1: Matting Performance
in UV acrylic ink at 10% addition of DOWSIL™ 603T Additive

Softness Evaluation

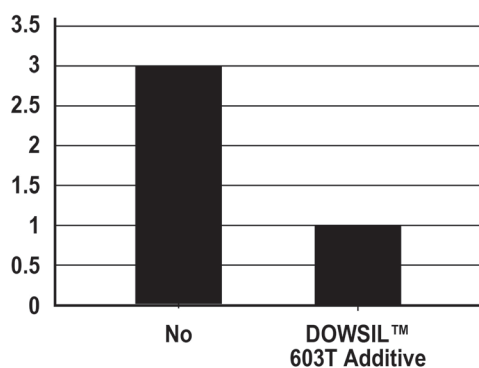


Figure 2: Softness Evaluation
with 10% addition of DOWSIL™ 603T Additive (1 = Pass, 3=Bad)

Scratch Resistance

Table 1: Scratch Resistance
in UV acrylic ink (10% Addition of DOWSIL™ 603T Additive)

E-Powder	Scratch test -Weight value (g)			
	30μ	60μ	90μ	120μ
No	50	100	100	150
DOWSIL™ 603T Additive	200	200	250	350

The value provides the force (weight) which is sufficient to see the first scratch effect through the surface coating

Handling Precautions

The user should incorporate proper handling and processing procedures to avoid flame and ignition sources. Please refer to the material safety data sheet for further information.

PRODUCT SAFETY INFORMATION REQUIRED FOR SAFE USE IS NOT INCLUDED IN THIS DOCUMENT. BEFORE HANDLING, READ PRODUCT AND SAFETY DATA SHEETS AND CONTAINER LABELS FOR SAFE USE, PHYSICAL AND HEALTH HAZARD INFORMATION. THE SAFETY DATA SHEET IS AVAILABLE ON THE DOW WEBSITE AT CONSUMER.DOW.COM, OR FROM YOUR DOW SALES APPLICATION ENGINEER, OR DISTRIBUTOR, OR BY CALLING DOW CUSTOMER SERVICE.

Usable Life and Storage

When stored at or below 25°C in the original unopened containers, this product has a usable life of 27 months from the date of production.

Limitations

This product is neither tested nor represented as suitable for medical or pharmaceutical uses.

Health And Environmental Information

To support customers in their product safety needs, Dow has an extensive Product Stewardship organization and a team of product safety and regulatory compliance specialists available in each area.

For further information, please see our website, consumer.dow.com or consult your local Dow representative.

consumer.dow.com

LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that our products are safe, effective, and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow's sole warranty is that our products will meet the sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DOW SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.

DOW DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.

