




# ENGAGE™ Polyolefin Elastomers

## Product selection guide for transportation applications

ENGAGE™ Polyolefin Elastomers (POE) are designed to enable thermoplastic olefins (TPO) to meet a variety of performance targets, especially in the areas of low temperature impact, melt flow, melt strength, flexibility, and softness. ENGAGE™ Polyolefin Elastomers are used in both rigid and soft TPO formulations for injection molding, thermoforming, and blow molding applications. They offer exceptional performance and a unique balance of properties when used at various levels in a formulation. The grade breadth includes ethylene octene and ethylene butene copolymers over a wide range of densities and melt flow rates.

In addition, the ENGAGE™ HM POE product line places increased emphasis on high melt strength and toughness. ENGAGE™ XLT POE offers opportunities to produce lighter, thinner TPO parts with increased stiffness, optimal impact strength, improved fit and finish, and reduced cycle times. And, next generation ENGAGE™ POE grades are enabling further vehicle lightweighting and improved manufacturing efficiencies.

Figure 1: ENGAGE™ Polyolefin Elastomers products<sup>(1,2)</sup>

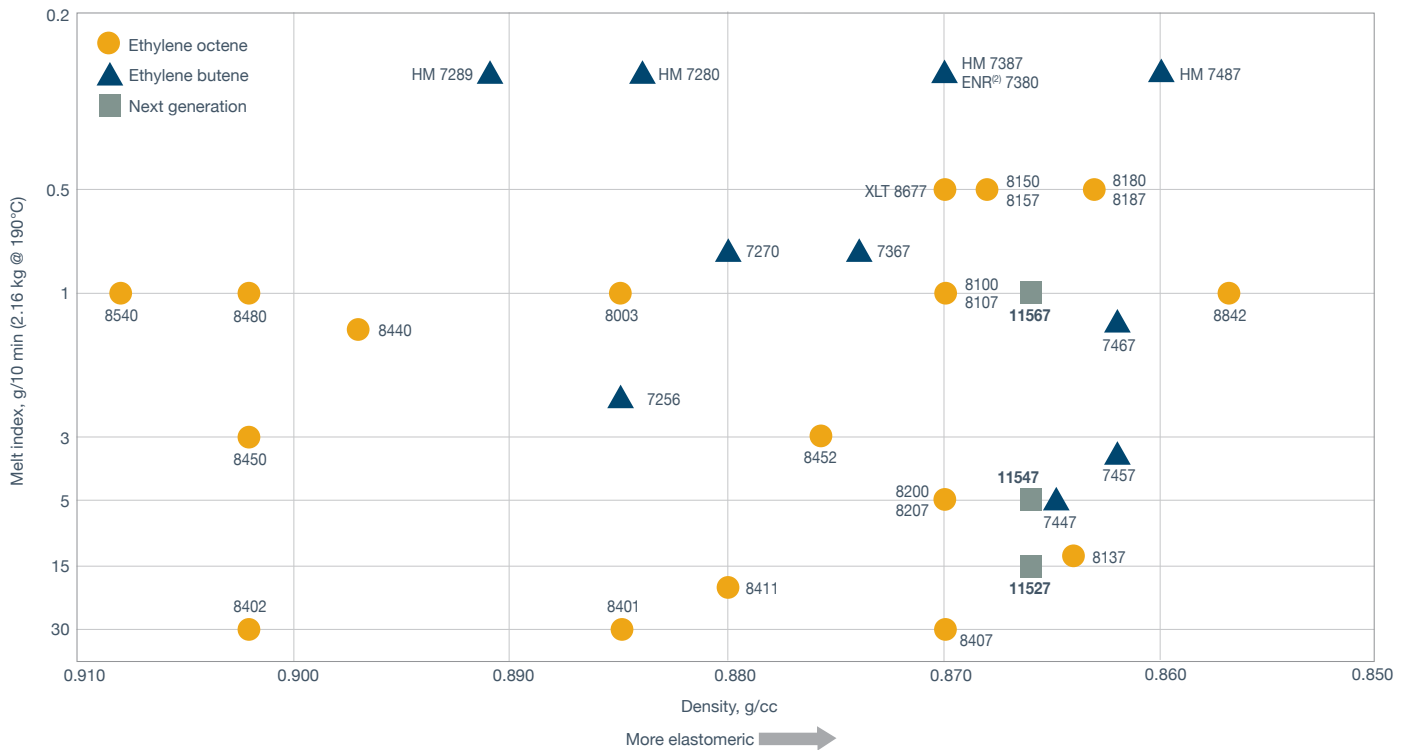

<sup>1)</sup> These are typical properties, not to be construed as specifications.

<sup>2)</sup> ENR designates a developmental grade.

## Innovative solutions for your processes and applications

Designed to improve impact performance, melt strength, or overall processability, ENGAGE™ Polyolefin Elastomers offer a wide range of grades to meet the most demanding processing and performance needs. They are compatible with most olefinic materials and offer unique capabilities that can enhance your product. Applications include a variety of interior and exterior components, such as bumper fascia, rocker panels, instrument panels, pillar moldings, and more. Next generation ENGAGE™ POE – the 11000 series of grades – are also enabling new, higher

performance TPOs with properties that are well suited for body panel applications, including rear lift gates. Some of the features and benefits provided by ENGAGE™ POE in automotive TPO applications include:

- Excellent physical properties including elasticity, toughness, and low temperature ductility
- High melt strength grades that enhance extrusion thermoform processing and reduce surface gloss
- High-efficiency grades, including XLT and next generation ENGAGE™ POE, for superior impact performance

**Table 1: Typical Properties of ENGAGE™ POE<sup>(1)</sup>**

Property	Ethylene Octene grades															
	8842 <sup>(2)</sup>	8180 8187 <sup>(2)</sup>	8137 <sup>(2)</sup>	8150 8157 <sup>(2)</sup>	8100 8107 <sup>(2)</sup>	8200 8207 <sup>(2)</sup>	8407 <sup>(2)</sup>	8452	8411	8003	8401	8440	8480	8450	8402	8540
Density, g/cc ASTM D792	0.857	0.863	0.864	0.868	0.870	0.870	0.870	0.875	0.880	0.885	0.885	0.897	0.902	0.902	0.902	0.908
Melt index, g/10 min (2.16 kg @ 190°C) ASTM D1238	1	0.5	13	0.5	1	5	30	3	18	1	30	1.6	1	3	30	1
Mooney viscosity, MU (ML 1+4 @ 121°C) ASTM D1646	25	37	4	33	24	8	2	11	3	23	2	13	20	10	2	20
Total crystallinity, % <sup>(3)</sup>	13	16	13	16	18	19	21	20	24	25	25	27	33	29	34	34
Durometer hardness (shore A) ASTM D2240	54	63	63	70	73	66	72	74	81	84	84	86	89	90	88	90
Durometer hardness (shore D) ASTM D2240	11	16	13	20	22	17	20	24	27	31	26	36	42	43	34	47
DSC melting peak, °C Rate 10°C/min <sup>(3)</sup>	38	47	56	55	60	59	65	66	76	77	80	93	99	97	96	104
Glass transition Temperature, °C DSC inflection point <sup>(3)</sup>	-58	-55	-55	-52	-52	-53	-54	-51	-50	-46	-47	-33	-31	-32	-36	-32
Haze, % ASTM D1003 <sup>(4)</sup>	N.D.	2	N.D.	4	9	2	N.D.	2	8	10	6	11	17	23	45	56
2% Secant flexural Modulus, MPa ASTM D790	4.0	7.7	7.3	14.4	13.1	10.8	10.5	16.8	20.5	32.6	30.6	54.3	81.5	78.3	72.0	107.8
Ultimate tensile strength, MPa (508 mm/min) ASTM D638	3.0	6.3	2.4	9.5	9.76	5.7	2.8	11.2	7.3	18.2	8.5	20.4	24.8	22.4	11.3	27.9
Ultimate tensile elongation, % (508 mm/min) ASTM D638	>600	>600	>600	>600	>600	>600	>600	>600	>600	>600	>600	>600	>600	>600	>600	>600

<sup>(1)</sup>These are typical properties, not to be construed as specifications.

<sup>(2)</sup>This grade contains a partitioning agent for improved product handling; properties may be measured before the addition of the partitioning agent.

<sup>(3)</sup>Dow Method. Additional information available upon request.

<sup>(4)</sup>Haze measured only for products with no partitioning agent. "N.D." indicates no data available.

(continued)

## Excellent processability

- Differentiated HM grades offer melt strength and shear thinning for extrusion, thermoforming, and blow molding applications
- XLT and next generation ENGAGE™ POE grades help reduce cycle times via improved flow and faster setting
- Compatible with most olefins
- Pellet form for easy handling, mixing, forming, and processing on plastic or rubber equipment
- Recyclable for in-process scrap re-use advantages and for environmental sustainability

**Table 2: Typical properties of ENGAGE™ POE – continued<sup>(1)</sup>**

Property	Ethylene butene grades						HM grades				XLT grade	Next generation grades		
	7467 <sup>(2)</sup>	7457 <sup>(2)</sup>	7447 <sup>(2)</sup>	7367 <sup>(2)</sup>	7270	7256	HM 7487 <sup>(2)</sup>	HM 7387 <sup>(2)</sup> ENR <sup>(3)</sup> 7380	HM 7280	HM 7289	XLT 8677 <sup>(2)</sup>	11567 <sup>(2)</sup>	11547 <sup>(2)</sup>	11527 <sup>(2)</sup>
Density, g/cc ASTM D792	0.862	0.862	0.865	0.874	0.880	0.885	0.860	0.870	0.884	0.891	0.870	0.866	0.866	0.866
Melt index, g/10 min (2.16 kg @ 190°C) ASTM D1238	1.2	3.6	5	0.8	0.8	2.5	<0.5	<0.5	<0.5	<0.5	0.5	1	5	15
Mooney viscosity, MU (ML 1+4 @ 121°C) ASTM D1646	19	9	7	24	24	13	47	54	42 <sup>(4)</sup>	74 <sup>(4)</sup>	45	N.D.	N.D.	N.D.
Total crystallinity, % <sup>(5)</sup>	12	12	13	16	19	23	13	16	25	28	13	10.6	10.5	8.7
Durometer hardness (shore A) ASTM D2240	52	50	64	65	80	84	58	66	84	88	51	60	60	55
Durometer hardness (shore D) ASTM D2240	12	12	12	23	26	30	14	22	29	31	11	N.D.	N.D.	N.D.
DSC melting peak, °C Rate 10°C/min <sup>(5)</sup>	34	40	35	51	64	76	37	50	99	99	118	121	119	118
Glass transition temperature, °C DSC inflection point <sup>(5)</sup>	-58	-56	-53	-51	-44	-42	-57	-52	-46	-52	-65	-62	-62	-62
Haze, % ASTM D1003 <sup>(6)</sup>	N.D.	N.D.	N.D.	N.D.	3	6	N.D.	56	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.
2% Secant flexural modulus, MPa ASTM D790	4	4.7	7.6	14.2	22.1	33.6	1.2	11.5	25.3	43.5	6.3	8.6	9.2	7.6
Ultimate tensile strength, MPa (508 mm/min) ASTM D638	2.0	1.8	2.4	5.2	13.9	9.3	2.4	9.1	5.1	3.7	3.0	5.1	2.9	1.2
Ultimate tensile elongation, % (508 mm/min) ASTM D638	>600	>600	>600	>600	>600	>600	>600	>600	310	200	>1,000	600	1,200	1,200

<sup>(1)</sup>These are typical properties, not to be construed as specifications.

<sup>(2)</sup>This grade contains a partitioning agent for improved product handling; properties may be measured before the addition of the partitioning agent.

<sup>(3)</sup>ENR designates a developmental grade.

<sup>(4)</sup>Measured at 150°C.

<sup>(5)</sup>Dow Method. Additional information available upon request.

<sup>(6)</sup>Haze measured only for products with no partitioning agent. "N.D." indicates no data available.

---

<b>Asia Pacific</b>	800 7776 7776	<b>Latin America</b>	<b>dow.com</b>
China	400 889 0789	Argentina	0800 266 0569
		Brazil	0800 047 4714
<b>Europe /</b>		Chile	1230 020 1124
<b>Middle East / Africa</b>	00800 369 4636 7	Colombia	01800 518 2475
Italy	800 783 825	Mexico	01800 083 4913
South Africa	0800 995 078	Venezuela	0800 100 2557
<b>North America</b>	800 258 2436		

---

NOTICE: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

NOTICE: If products are described as "experimental" or "developmental": (1) product specifications may not be fully determined; (2) analysis of hazards and caution in handling and use are required; (3) there is greater potential for Dow to change specifications and/or discontinue production; and (4) although Dow may from time to time provide samples of such products, Dow is not obligated to supply or otherwise commercialize such products for any use or application whatsoever.

This document is intended for use globally.

© 2019 The Dow Chemical Company

®™ Trademark of The Dow Chemical Company ("Dow") or an affiliated company of Dow.

S2D 92431

Form No. 777-088-01E-0819